

# JOB-MAN 1925



Engine type:	<b>Perkins 403J-11</b>
Cylinders:	<b>3</b>
Engine Capacity (cm <sup>3</sup> ):	<b>1131</b>
Operating voltage (V):	<b>12</b>
Standard tire size:	<b>Tires 10,0/75x15.3 AS</b>



## Standard equipment:

One-hand operation with floating + locking position (side of the seat)
Front hydraulic connection DN12
Hydraulic quick-change system for included tools
Fully hydraulic articulated steering
Hydraulic oil cooler (combined cooler)
Comfortable seat with seat belt
Work lights front/rear
Fuel gauge
Engine hour meter
Adjustable steering column

Drum brake / combination hydrostatic
Parking brake drum
Differential lock 100%
Hydrostatic four-wheel drive
Roll-over bar/canopy ROPS/FOPS certified
CE approved
Seat with seat belt
Battery switch
Tow bar

## Technical Specifications:

Engine type	<b>Perkins 403J-11</b>
Cylinders	<b>3</b>
Engine Capacity (cm <sup>3</sup> )	<b>1131</b>
Emissions standard	<b>Level 5</b>
Exhaust gas aftertreatment	<b>No</b>
Cooling system	<b>Liquid</b>
<b>Electrical system</b>	
Operating voltage (V)	<b>12</b>
<b>Weight</b>	
Operating weight (standard with bucket) (kg)	<b>2100</b>

## Tipping load in bucket (kg) according to ISO 14397

Lift frame horizontal / straight machine	<b>1070</b>
Lift frame horizontal / articulated machine	<b>770</b>

## Tip load on pallet forks (kg) according to ISO 14397

Lift frame horizontal / straight machine (S)	<b>1440</b>
Lift frame horizontal / straight machine (T)	<b>1250</b>
Lift frame horizontal / straight machine (U)	<b>925</b>
Lift frame horizontal / straight machine (V)	<b>730</b>
Lift frame down / straight machine (W)	<b>1980</b>
Lift frame down / straight machine (X)	<b>1200</b>
Lift frame down / straight machine (J)	<b>990</b>

# JOB-MAN 1925



## Technical Specifications:

### Vehicle data

Single- or two-stage powershift	<b>Yes</b>
Fuel tank capacity (l)	<b>46</b>
Hydraulic tank capacity (l)	<b>30</b>

### Hydraulic

Manufacturer	<b>Bosch Rexroth</b>
Hydrostatic all-wheel drive	<b>Yes</b>

Flow rate (l/min)	<b>80</b>
Working pressure (bar)	<b>305</b>

### Hydraulic actuation

Flow rate (l/min)	<b>42</b>
Working pressure (bar)	<b>200</b>


### Hydraulic control

Flow rate (l/min)	<b>42</b>
Working pressure (bar)	<b>150</b>

## Dimensions:

A	Wheelbase	<b>1413 mm</b>
B	Front axle for tool bolts	<b>478 mm</b>
C	Rear axle	<b>798 mm</b>
D	Length without tools	<b>2689 mm</b>
E	Length with bucket	<b>3579 mm</b>
F	Height to seat	<b>1170 mm</b>
G	Bucket depth below ground clearance	<b>25 mm</b>
H	Height to cab roof	<b>2192 mm</b>
H2	Height with roof folded	<b>1755 mm</b>
J	Unloading height	<b>1285 mm</b>
K	Loading height	<b>1835 mm</b>
L	Maximum height to bucket pivot point	<b>2110 mm</b>
M	Total working height	<b>2881 mm</b>

N	Dumping range	<b>501 mm</b>
O	Rear adjustment angle on ground	<b>57°</b>
P	Max. unloading angle	<b>35°</b>
Q	Rear adjustment angle (v/max. height)	<b>57°</b>
R	Track width	<b>714 mm</b>
S	Width/turned wheel	<b>930/1060 mm</b>
T	Ground clearance	<b>208 mm</b>
U	Inside turning radius	<b>865 mm</b>
V	Outside turning radius	<b>1829 mm</b>
W	Outside turning radius with bucket	<b>2210 mm</b>
X	Articulated joint angle	<b>54°</b>
Y	Rear angle	<b>24,8</b>
Z	Additional length with roof folded	<b>161 mm</b>

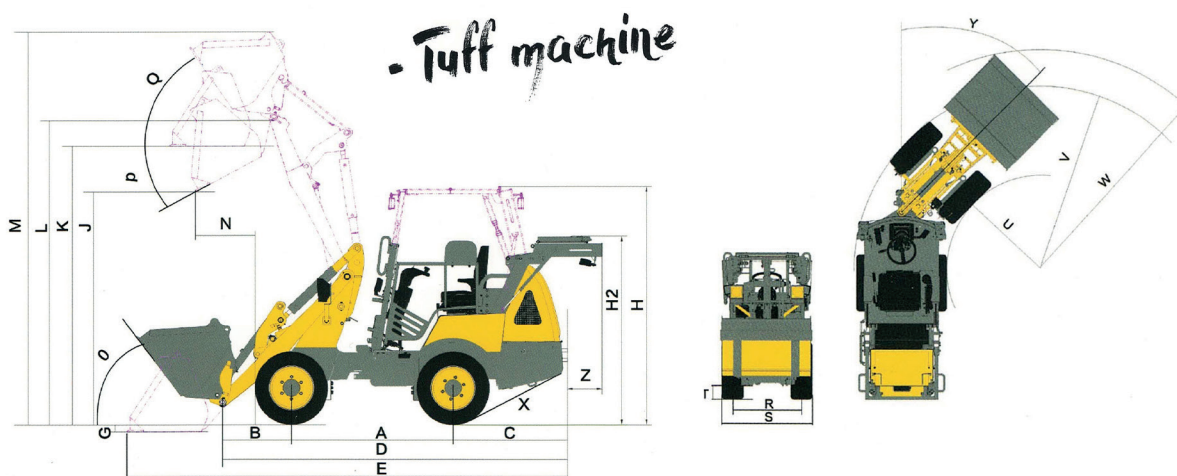

**JOB-MAN**   
[www.job-man.dk](http://www.job-man.dk)

JOB-MAN is a mini loader developed and designed in Denmark. The machines are manufactured according to European standards with Bosch Rexroth hydraulic components and Perkins/Yanmar engines. JOB-MAN compact loaders have been sold since 2006, with more than 1,800 machines in Europe.